

VHF.50.SS



50L Volume Capacity

Internal Hopper Feeder



SOP Recipe Management

Store up to 10 Pre-set



Large Diameter Input with 12" Funnel

DN65 Tri-Clamp 65mm Input Diameter



Food Safe Design

304/316 Stainless Steel Construction Smooth



📞 US: +1 (603) 800 1799

📞 UK: +44 (0)1908 618 200

@ sales@sampleautomation.com



Features


- ⚙️ Stainless Steel Hopper Assembly
- ⚙️ Stainless Steel Agitator with Variable Speed
- ⚙️ Stainless Steel Flight Auger with Variable Speed
- ⚙️ Smooth Finished Welds
- ⚙️ Direct P19 Attachment
- ⚙️ Sanitary Silicone Reducer Attachment
- ⚙️ Food Grade 304 & 316 Stainless Steel Frame

Electrical

- ⚙️ 110V Single Phase 50/60Hz -1725 watt, 8Nm
- ⚙️ 220V Double Phase 50/60Hz - 2350 watt, 10Nm
- ⚙️ 400V Three Phase 50/60Hz - 5000 watt, 30Nm
- ⚙️ Nema 34 - 12Nm 20A 24VDC Stepper Motor

Controls

- ⚙️ 5.7" Touch Screen HMI
- ⚙️ Emergency Stop and Isolation Switch
- ⚙️ Automated Auxiliary Controls
- ⚙️ SOP Recipe Speed and Setting Controls
- ⚙️ Password Setting Controls
- ⚙️ Feeder Exit Port Laser Sensor
- ⚙️ Collection Container Point Sensor

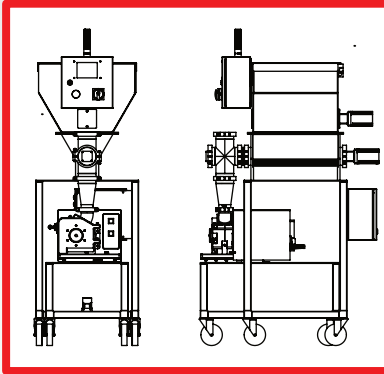

Dimensions:

- ⚙️ VHF.50.19: without Cyclone (102cm L x 60cm W x 178cm H)
- ⚙️ Weight: 175Kg

