

Dimensions: in [mm]

Plumbing Requirements:

Feed: 2" Tri-Clamp  
 Concentrate: 2" Tri-Clamp  
 Permeate: 2" Tri-Clamp  
 Vent: 2" Tri-Clamp  
 Hot Water: 1" NPTM x 2  
 FFE Solvent  
 (Optional): 2" Tri-Clamp

Electrical Requirements:

16A @ 480VAC  
 10/4 SOOW Cord;  
 NEMA L16-20 Connector

Air Requirements:

1/2" Tube;  
 20-50 scfm;  
 20-120 psi


1	Initial Draft	4/24/20
No.	Revision Details	Date

Drawing Name

ETH-REC-150\_V4

Dimensions: in [mm]

General Notes:

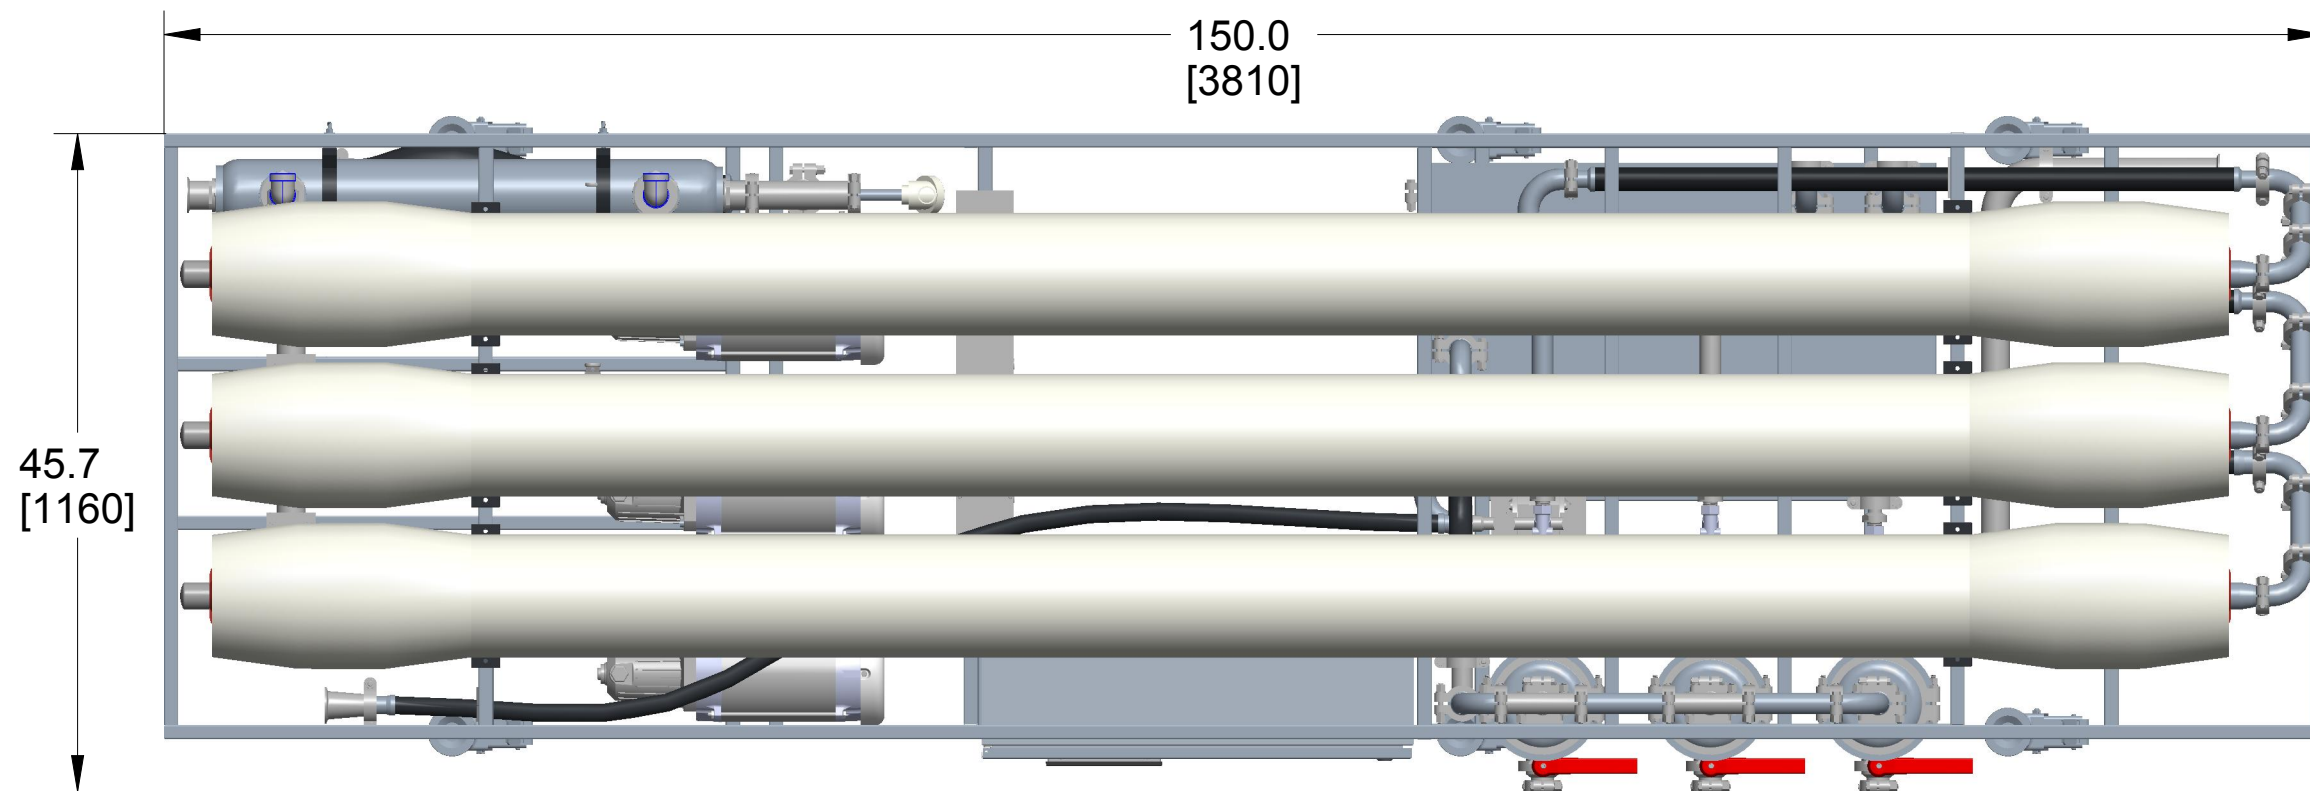


1	Initial Draft	4/24/20
No.	Revision Details	Date

Drawing Name  
ETH-REC-150\_V4

Dimensions: in [mm]

General Notes:

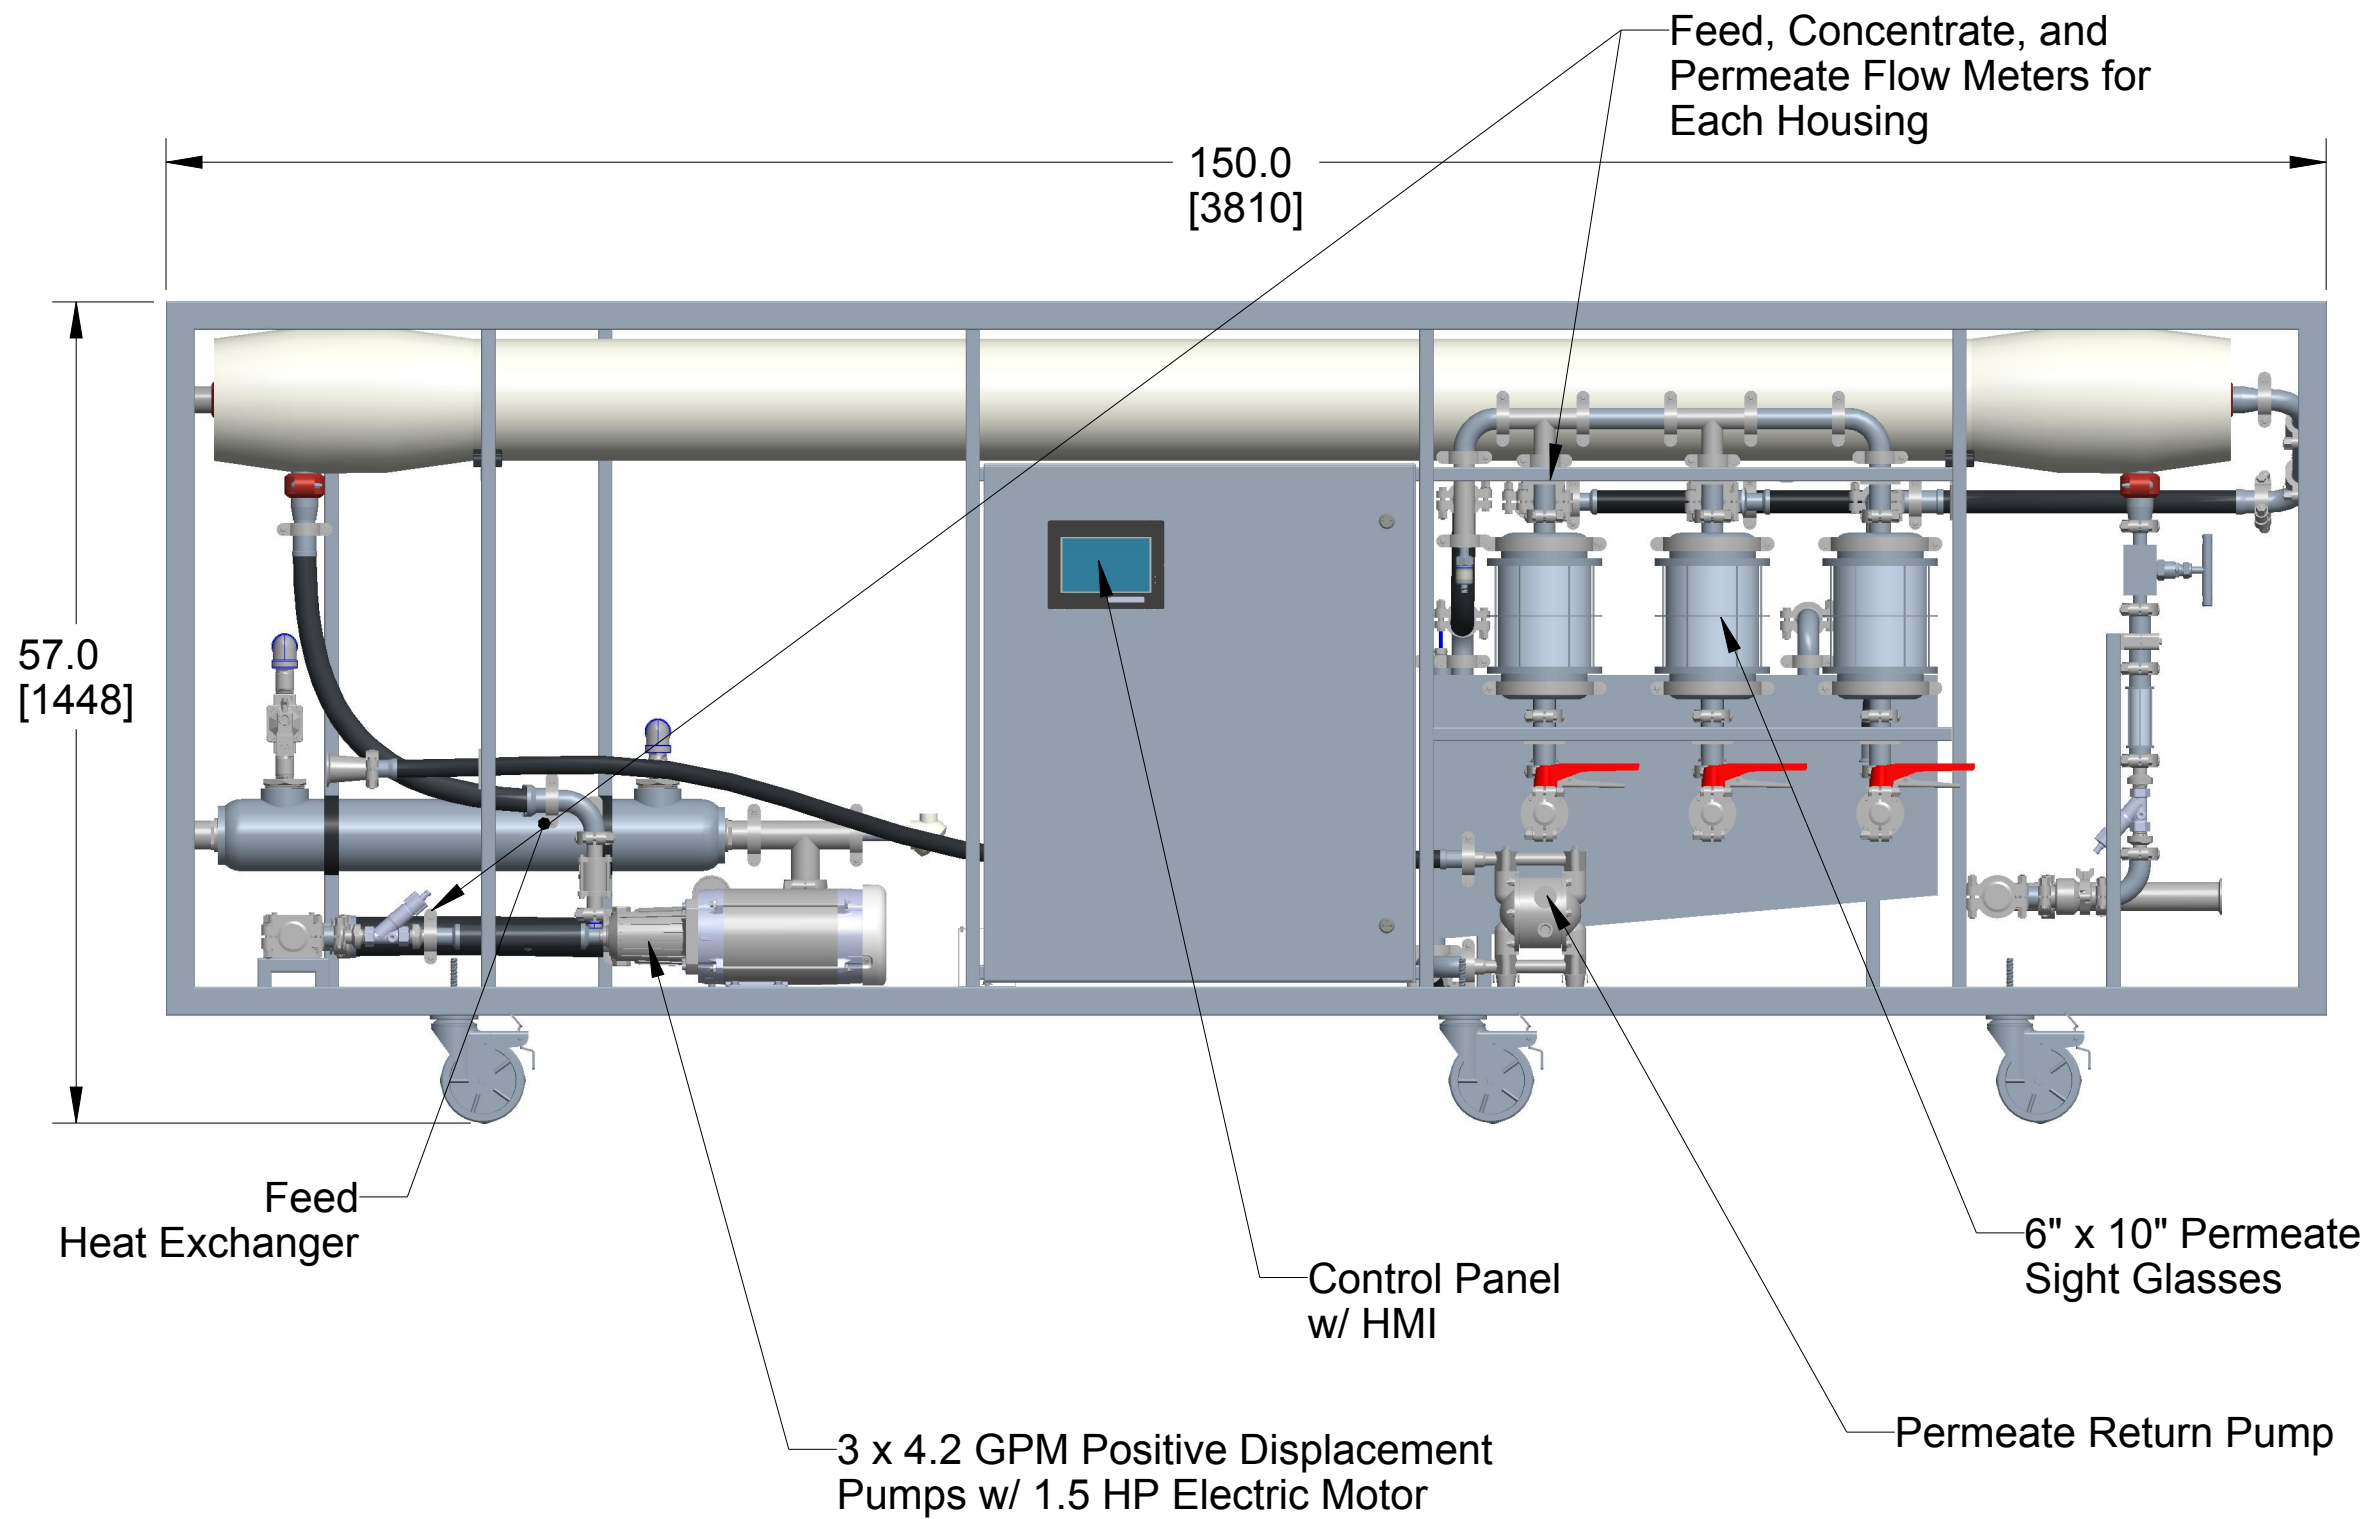


1	Initial Draft	4/24/20
No.	Revision Details	Date

Drawing Name  
ETH-REC-150\_V4



Dimensions: in [mm]

General Notes:

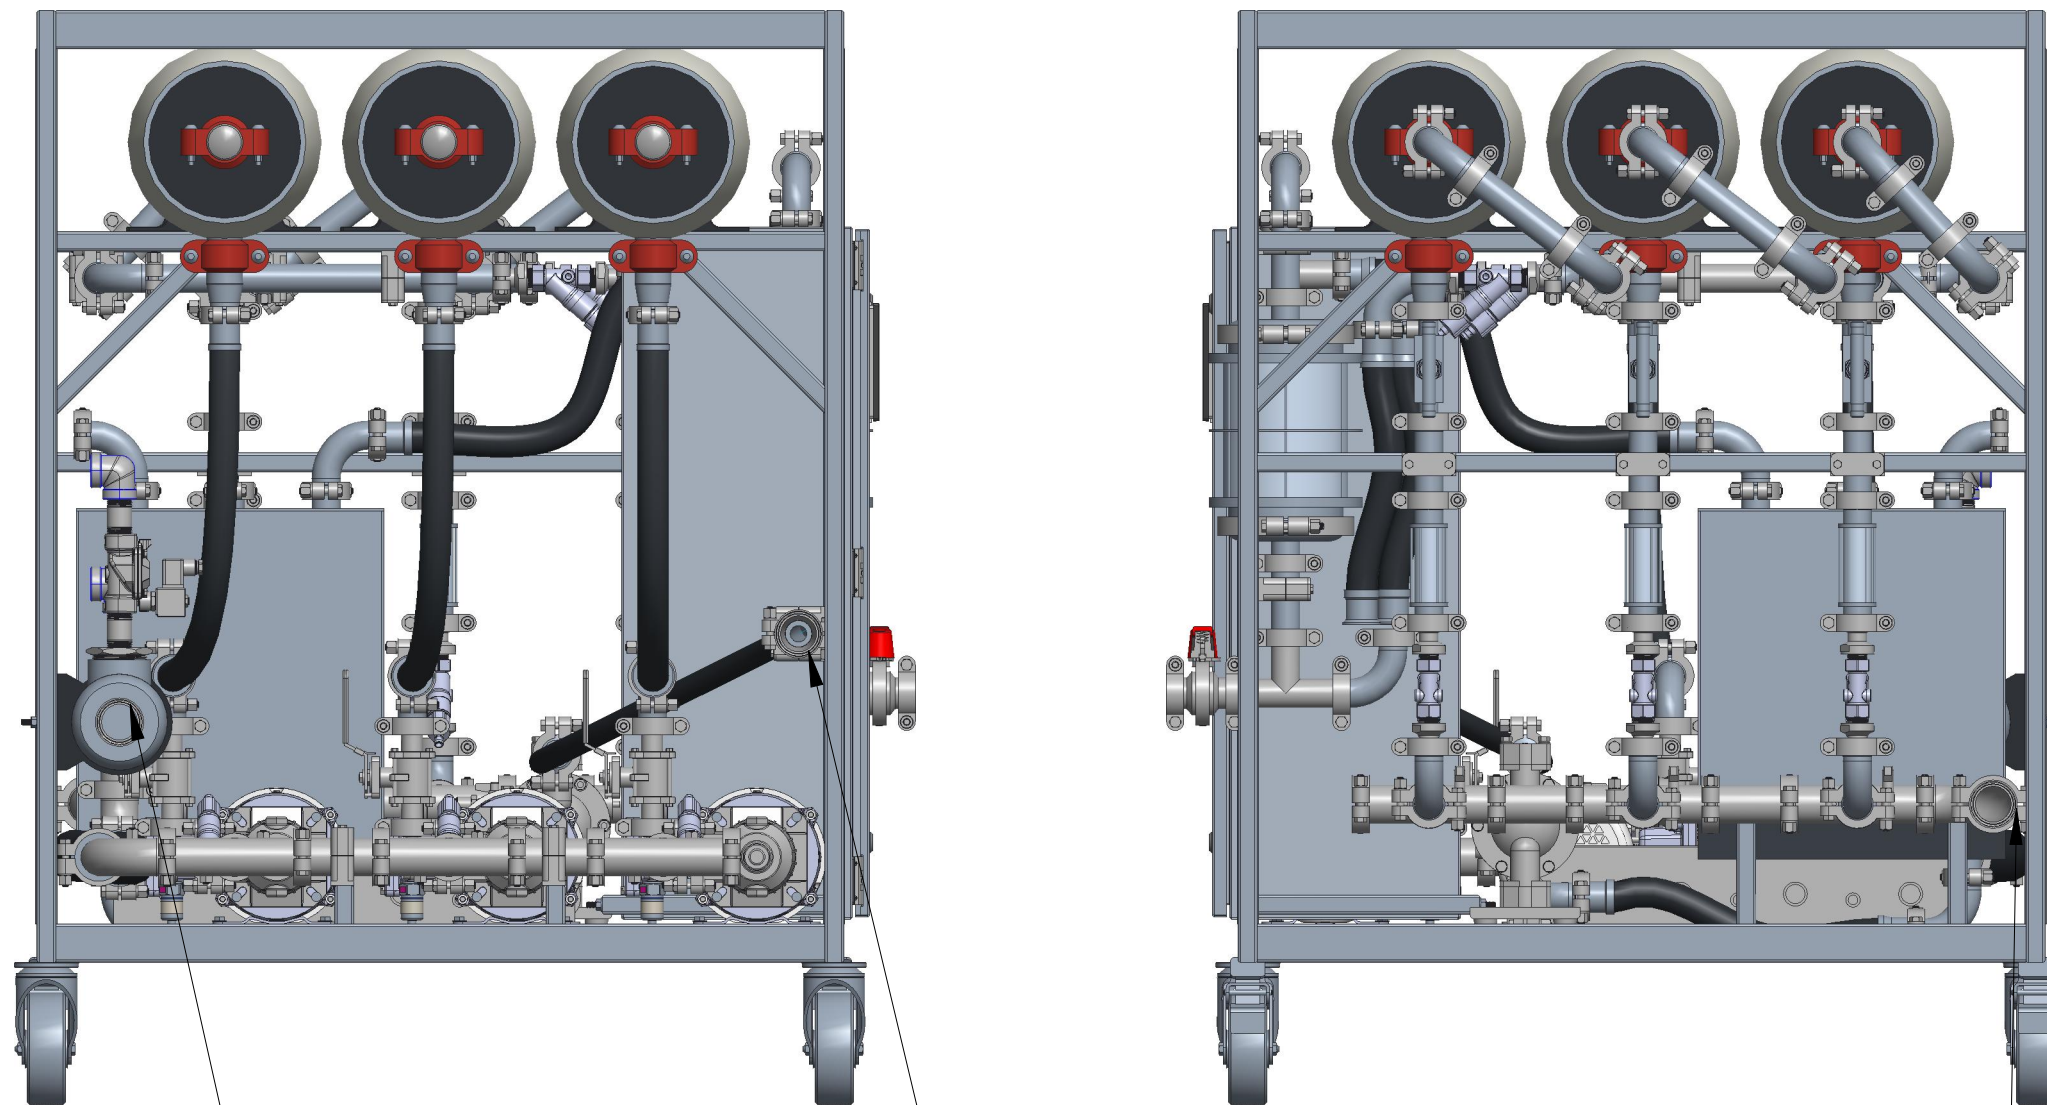

Feed Connection  
2" Tri-Clamp

Permeate Connection  
2" Tri-Clamp


Concentrate Connection  
2" Tri-Clamp

1	Initial Draft	4/24/20
No.	Revision Details	Date

Drawing Name  
ETH-REC-150\_V4

Dimensions: in [mm]

General Notes:

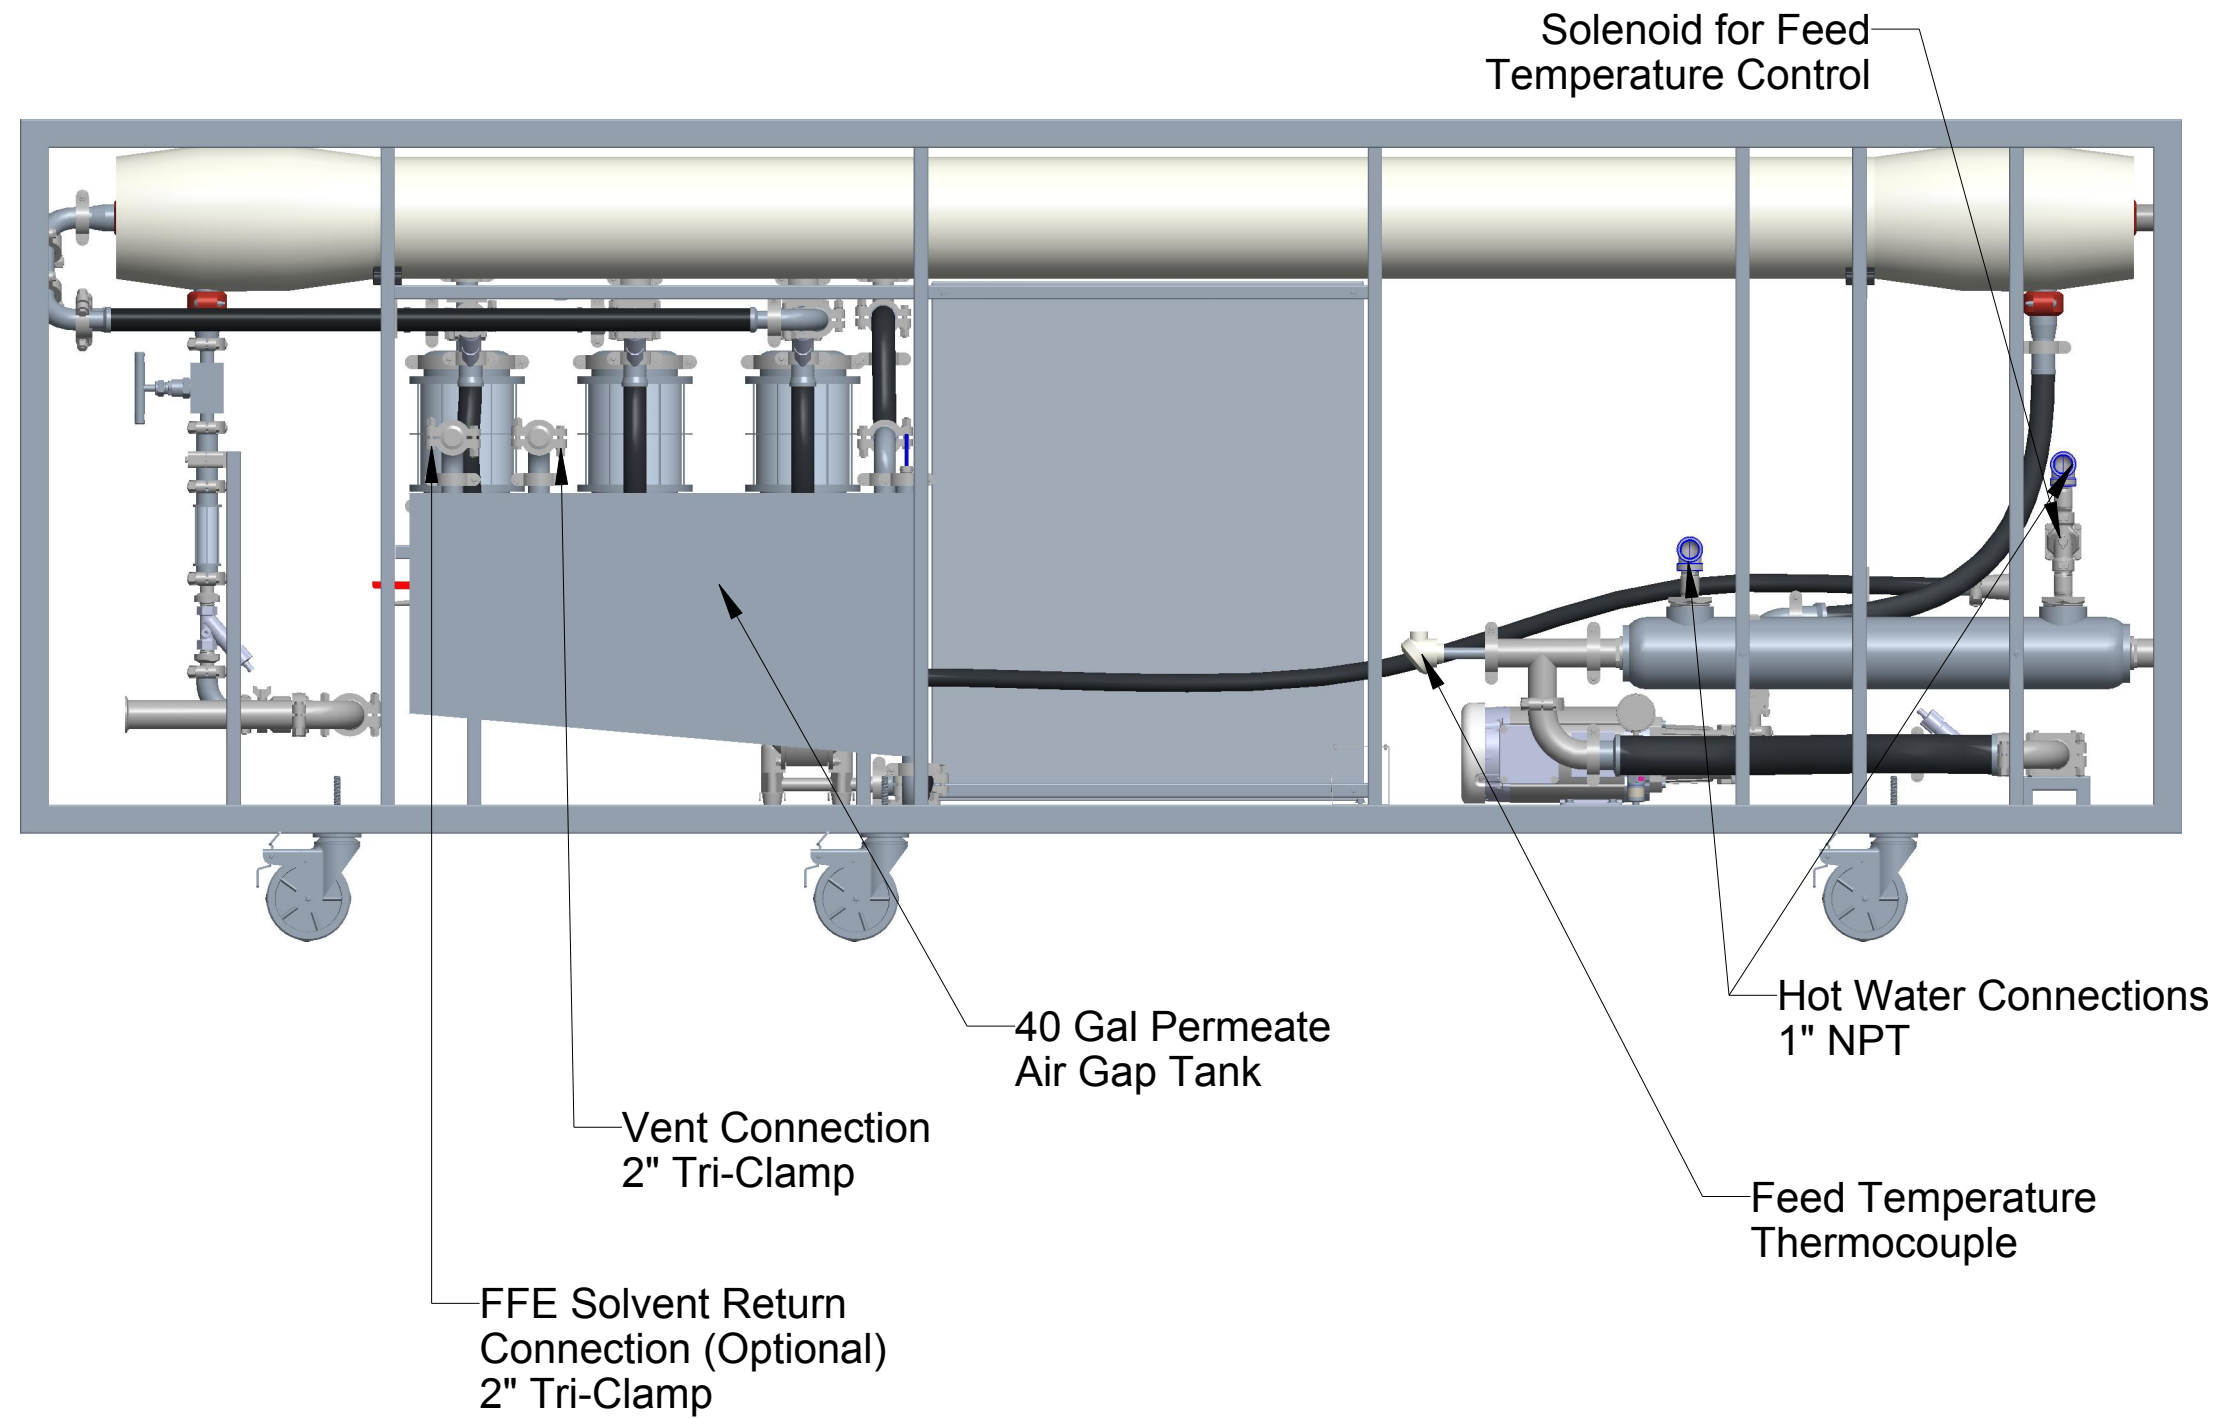

1	Initial Draft	4/24/20
No.	Revision Details	Date

Drawing Name  
ETH-REC-150\_V4